




PRELIMINARY VERSION

FMH-K-R000 (0603)

ISA-PLAN® HIGH POWER JUMPER

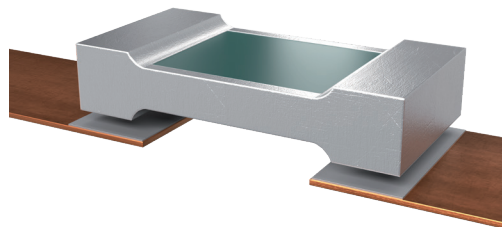

FEATURES

- 0.135 W power rating at 125 °C
- Constant current up to 26 A
- Standard pad size (0603)
- Mounting: Reflow-, and IR-soldering
- AEC-Q200 qualification in process
- Full copper construction and tinned terminals



APPLICATIONS

- Jumper
- Multiple usage of PCB layouts

Technical data

Resistance values	mOhm	<0.2
Temperature coefficient (20-60 °C)	ppm/K	3200 ± 500
Applicable temperature range	°C	-65 to +170
Power rating	W	0.135
Inductance	nH	<1
Current	A	26

Ordering code

FMH - K - R000

- Resistance value [Ohm] / „R” represents decimal point
- Resistance material / K=copper
- Type

Information


B-samples	available on request
AEC-Q200 qualification	available in July 2025
SOP	January 2026

Recommended solder profile


Reflow- and IR-soldering				
Temperature	°C	260	255	217
Time	sec	peak	40	90

Tape and reel information

Specification	DIN EN 60286-3			
Tape width (paper)	mm	8		
Reel size	inch	13		
Parts per reel	pcs	15000		

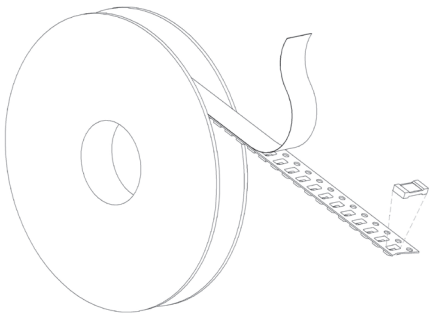


Mechanical dimensions and pcb-layout proposal (Reflow-soldering) [mm]

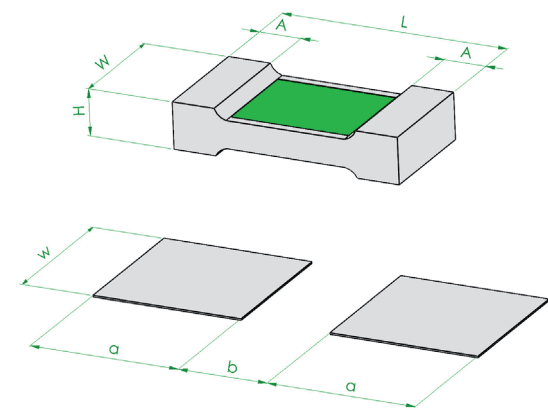

type:	L	W	H	A
FMH	1.52 ±0.2	0.76 ±0.2	0.3 ±0.15	0.28 ±0.2

solder pad type:	a	b	w
FMH	1.0	0.6	0.96

Power derating curve

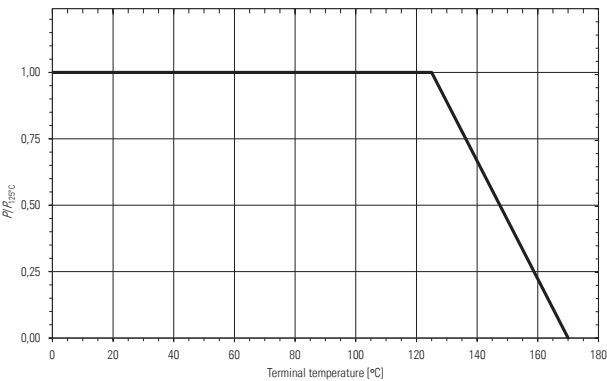

Specification		
Parameters	Test conditions	Specified values
Temperature Cycling	2000 cycles (-55 °C to +150 °C)	qualification in process
Low Temperature Storage and Operation	-65 °C for 250 h	
Resistance to Soldering Heat	3x reflow soldering (conditon K) time above 217 °C, 60s-150s	
Operational Life	2000 h, at nominal load	
High Temperature Exposure	2000 h / 170 °C	
Bias Humidity	+85 °C, 85 r.F., 1000 h	

Disclaimer // All products, product specifications and data are subject to change without notice. The product specifications do not expand or otherwise modify Isabellenhütte's terms and conditions of sale, including but not limited to, the warranty expressed therein. Isabellenhütte makes no warranty, representation or guarantee other than as set forth in its terms and conditions of sale. Information provided in datasheets and/or specifications may vary from actual results in different applications. Any statements made by Isabellenhütte regarding the suitability of products for certain types of applications are based on its knowledge of typical requirements that are often placed on its products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in the application intended. No license, express or implied, or otherwise, to any intellectual property rights is granted by this document. Any and all liability arising out of the application or use of any product shall be as set forth in Isabellenhütte's terms and conditions of sale.